



ColorEdge CS2410

Create the world as you see it. This 24.1 inch hardware calibration monitor covers more than 100% of the sRGB color space, making it ideal for digital media creation, photography and illustration.



Size: 24.1" (61.1 cm)

Resolution: 1920 x 1200 (16:10 aspect ratio)

Pixel Density: 94ppi

Colour: DisplayPort, HDMI, DVI-D: 16.77 million

Warranty: Five Year On-site

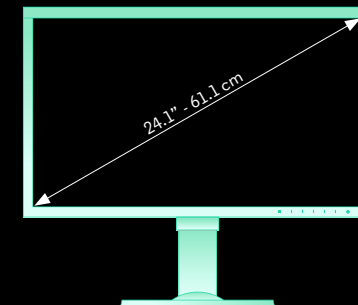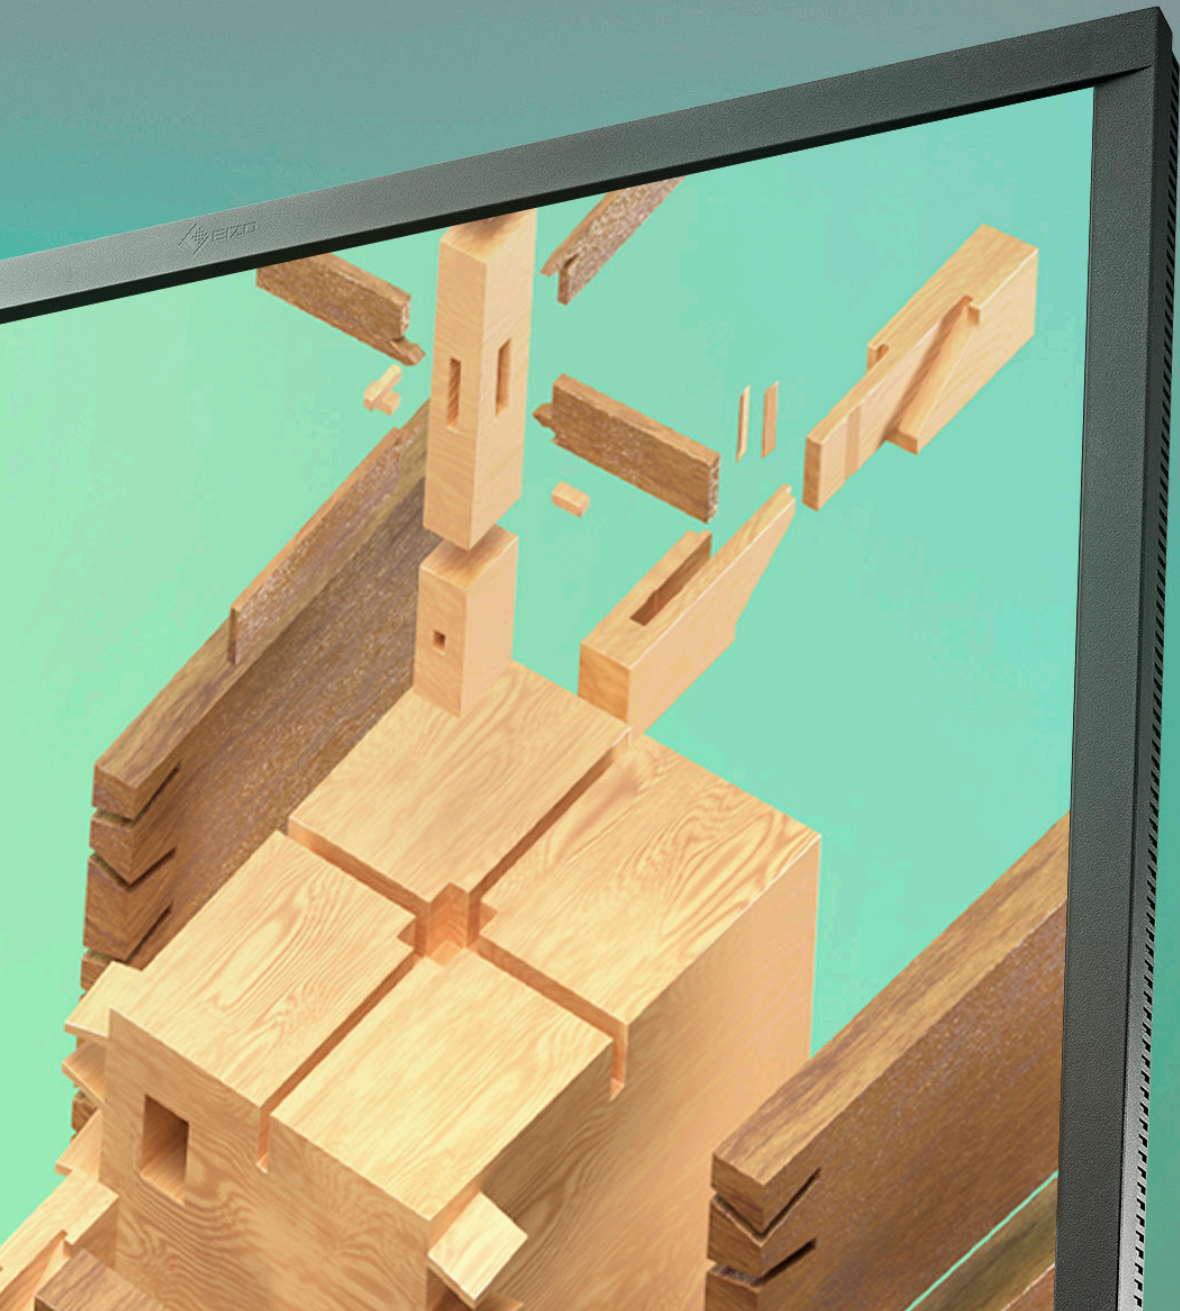


5 | Year on site Warranty
★★★★★



ColorEdge CS2410

Dimensions (Unit: mm)

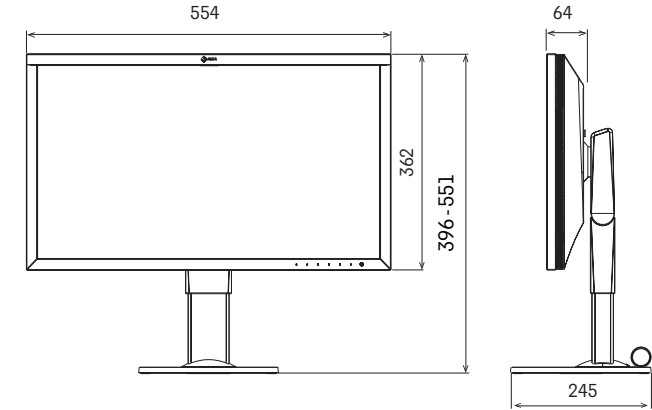

Panel

Type: IPS
Backlight: LED
Size: 24.1" / 61.1 cm
Native Resolution:
1920 x 1200 (16:10 aspect ratio)
Viewable Image Size (H x V): 518.4 x 324.0 mm
Pixel Pitch: 0.270 x 0.270 mm
Pixel Density: 94ppi
Greyscale Tones: DisplayPort, HDMI,
DVI-D: 256 tones (a palette of 65 thousand
tones)
Display Colours: DisplayPort, HDMI,
DVI-D: 16.77 million
Viewing Angles (H / V, Typical): 178°, 178°
Brightness (Typical): 300 cd/m²
Recommended Brightness for Calibration:
120 cd/m² or less
Contrast Ratio (Typical): 1000:1
Response Time (Typical): 14 ms (grey-to-grey)
Wide Gamut Coverage (Typical):
sRGB: 100%

Video Signals

Input Terminals: DisplayPort (HDCP1.3),
HDMI (DeepColor, HDCP1.4), DVI-D
(HDCP1.4)
Digital Scanning Frequency (H / V):
DisplayPort, DVI: 26 - 78 kHz, 23 - 63 Hz
HDMI: 15 - 68 kHz, 23 - 63 Hz

USB

Function: 1 port for monitor control
3-port USB hub
Standard: USB 3.1

Power

Power Requirements:
AC 100 - 240 V, 50 / 60 Hz
Maximum Power Consumption: 57 W
Typical Power Consumption: 18 W
Power Save Mode: 0.7 W or less
Standby Mode: 0.6 W or less

Features & Functions

Digital Uniformity Equaliser: Yes
Preset Modes: Color Mode
(Custom, sRGB, Calibration)

Physical Specification

Dimensions (Landscape, W x H x D):
554.4 x 396-551 x 245 mm
Dimensions (Portrait, W x H x D):
362 x 565.4-647.2 x 245 mm
Dimensions (Without Stand, W x H x D):
554.4 x 362 x 64 mm
Net Weight: 7.9 kg
Net Weight (Without Stand): 5.1 kg
Height Adjustment Range: 155 mm
Tilt: 35° Up, 5° Down
Pivot: 90°
Swivel: 344°
Hole Spacing (VESA Standard):
100 x 100 mm

Environmental Requirements

Temperature: 0 - 35°C
Humidity (R.H., non condensing): 20 - 80 %

Certifications & Standards

(Please contact EIZO for the latest information)
CB, CE, TUV/GS, cTUVus, FCC-B, CAN
ICES-3 (B), TUV/S, PSE, VCCI-B, RCM, EAC,
RoHS, WEEE, TUV/Ergonomics

Included Cables

DisplayPort (2 m), HDMI (2 m), AC power cord,
USB cable

Warranty

Five years on-site^{1,2}

¹ Usage time is limited to
30,000 hours.

² Free from bright sub-pixels for 6
months for the date of purchase.
With current LCD technology, a
panel may contain a limited number
of missing or flickering pixels.

EIZO Limited

1 Queens Square, Ascot Business
Park, Lyndhurst Road, Ascot,
Berkshire, SL5 9FE. UK

Website:

www.EIZOcolour.com

Telephone:

+44 (0) 1344-317-480